


MINI一体成型电感

产品尺寸 Product Size

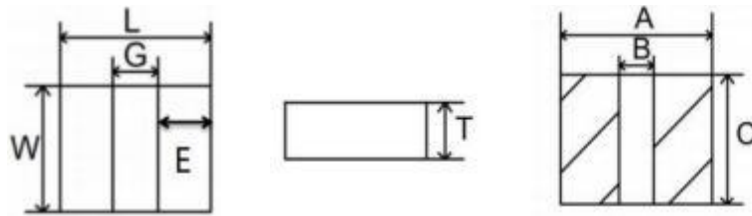

单位 Unit: 毫米 (mm)

型号 Size	L	G	W	E	T	A	B	C
160808系列	1.6 ± 0.2	0.6 ± 0.2	0.8 ± 0.2	0.50 ± 0.2	0.80 Max	1.70 Ref	0.50 Ref	0.90 Ref
201208系列	2.0 ± 0.2	0.6 ± 0.2	1.2 ± 0.2	0.70 ± 0.2	0.80 Max	2.10 Ref	0.50 Ref	1.30 Ref
201210系列	2.0 ± 0.2	0.6 ± 0.2	1.2 ± 0.2	0.70 ± 0.2	1.00 Max	2.10 Ref	0.50 Ref	1.30 Ref
201608系列	2.0 ± 0.2	0.6 ± 0.2	1.6 ± 0.2	0.70 ± 0.2	0.80 Max	2.10 Ref	0.50 Ref	1.70 Ref
201610系列	2.0 ± 0.2	0.6 ± 0.2	1.6 ± 0.2	0.70 ± 0.2	1.00 Max	2.10 Ref	0.50 Ref	1.70 Ref
201612系列	2.0 ± 0.2	0.6 ± 0.2	1.6 ± 0.2	0.70 ± 0.2	1.20 Max	2.10 Ref	0.50 Ref	1.70 Ref
252010系列	2.5 ± 0.2	0.8 ± 0.2	2.0 ± 0.2	0.85 ± 0.2	1.00 Max	2.60 Ref	0.70 Ref	2.10 Ref
252012系列	2.5 ± 0.2	0.8 ± 0.2	2.0 ± 0.2	0.85 ± 0.2	1.20 Max	2.60 Ref	0.70 Ref	2.10 Ref
303015系列	3.0 ± 0.1	0.9 ± 0.2	3.0 ± 0.1	1.00 ± 0.2	1.50 Max	3.00 Ref	0.80 Ref	3.00 Ref
303020系列	3.0 ± 0.1	0.9 ± 0.2	3.0 ± 0.1	1.00 ± 0.2	2.00 Max	3.00 Ref	0.80 Ref	3.00 Ref
322510系列	3.2 ± 0.2	1.0 ± 0.2	2.5 ± 0.2	1.05 ± 0.2	1.00 Max	3.20 Ref	0.90 Ref	2.50 Ref
322512系列	3.2 ± 0.2	1.0 ± 0.2	2.5 ± 0.2	1.05 ± 0.2	1.20 Max	3.20 Ref	0.90 Ref	2.50 Ref
322520系列	3.2 ± 0.2	1.0 ± 0.2	2.5 ± 0.2	1.05 ± 0.2	2.00 Max	3.20 Ref	0.90 Ref	2.50 Ref
404012系列	4.1 ± 0.2	1.3 ± 0.2	4.1 ± 0.2	1.40 ± 0.2	1.20 Max	4.10 Ref	1.10 Ref	4.10 Ref
404020系列	4.1 ± 0.2	1.3 ± 0.2	4.1 ± 0.2	1.40 ± 0.2	2.00 Max	4.10 Ref	1.10 Ref	4.10 Ref
404030系列	4.1 ± 0.2	1.3 ± 0.2	4.1 ± 0.2	1.40 ± 0.2	3.00 Max	4.10 Ref	1.10 Ref	4.10 Ref

DHMN160808系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN160808B-R22M	0.22	$\pm 20\%$	1000	1000	33	40	3.00	3.40	5.00	5.50
DHMN160808B-R24M	0.24	$\pm 20\%$	1000	1000	34	41	2.90	3.30	4.80	5.30
DHMN160808B-R24M01	0.24	$\pm 20\%$	1000	1000	22	26	3.50	3.90	4.40	4.90
DHMN160808B-R47M	0.47	$\pm 20\%$	1000	1000	80	100	2.30	2.60	3.70	4.10
DHMN160808B-R47M01	0.47	$\pm 20\%$	1000	1000	38	45	3.40	3.80	3.50	4.00
DHMN160808B-R56M	0.56	$\pm 20\%$	1000	1000	85	110	1.90	2.20	3.50	4.00
DHMN160808B-R56M01	0.56	$\pm 20\%$	1000	1000	51	63	2.20	2.50	2.70	3.00
DHMN160808B-R68M	0.68	$\pm 20\%$	1000	1000	110	130	1.90	2.10	3.00	3.30
DHMN160808B-1R0M	1.0	$\pm 20\%$	1000	1000	180	220	1.80	2.10	2.60	3.00
DHMN160808G-1R0M01	1.0	$\pm 20\%$	1000	1000	105	115	1.80	2.10	2.10	2.30
DHMN160808G-2R2M	2.2	$\pm 20\%$	1000	1000	220	260	1.20	1.40	1.30	1.50
DHMN160808B-3R3M	3.3	$\pm 20\%$	1000	1000	500	600	0.90	1.00	1.20	1.40
DHMN160808B-4R7M	4.7	$\pm 20\%$	1000	1000	585	700	0.80	1.00	1.00	1.20

DHMN201208系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN201208B-R11M	0.11	$\pm 20\%$	1000	1000	10	12	6.50	7.00	9.00	9.50
DHMN201208B-R24M	0.24	$\pm 20\%$	1000	1000	18	23	5.90	6.50	6.00	6.50
DHMN201208G-R24M02	0.24	$\pm 20\%$	1000	1000	17	20	5.50	6.00	6.60	7.00
DHMN201208B-R33M	0.33	$\pm 20\%$	1000	1000	33	45	4.00	4.30	4.80	5.20
DHMN201208B-R47M	0.47	$\pm 20\%$	1000	1000	34	50	3.30	3.50	4.60	5.00
DHMN201208B-R47M01	0.47	$\pm 20\%$	1000	1000	24	28	4.50	4.70	4.80	5.20
DHMN201208B-R68M	0.68	$\pm 20\%$	1000	1000	50	60	3.30	3.70	3.70	4.20
DHMN201208B-1R0M	1.0	$\pm 20\%$	1000	1000	55	70	2.90	3.30	3.50	4.00
DHMN201208B-1R0M01	1.0	$\pm 20\%$	1000	1000	48	55	2.80	3.20	2.80	3.20
DHMN201208B-1R5M	1.5	$\pm 20\%$	1000	1000	118	135	1.90	2.20	2.50	3.00
DHMN201208B-2R2M	2.2	$\pm 20\%$	1000	1000	160	185	1.80	2.20	2.30	2.60
DHMN201208B-3R3M	3.3	$\pm 20\%$	1000	1000	253	300	1.50	1.80	1.60	1.90
DHMN201208G-4R7M	4.7	$\pm 20\%$	1000	1000	285	325	1.50	1.70	1.40	1.60

DHMN201210系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN201210B-R10M	0.10	$\pm 20\%$	1000	1000	8	13	7.00	7.50	8.00	8.50
DHMN201210B-R22M	0.22	$\pm 20\%$	1000	1000	16	22	6.50	7.10	6.80	7.30
DHMN201210B-R24M	0.24	$\pm 20\%$	1000	1000	17	23	6.40	7.00	6.70	7.20
DHMN201210G-R24M01	0.24	$\pm 20\%$	1000	1000	13	17	6.40	7.00	6.70	7.20
DHMN201210B-R33M	0.33	$\pm 20\%$	1000	1000	24	32	5.00	5.50	6.00	6.50
DHMN201210G-R33M02	0.33	$\pm 20\%$	1000	1000	18	22	5.20	5.70	6.30	6.70
DHMN201210B-R47M	0.47	$\pm 20\%$	1000	1000	29	36	4.30	4.70	5.00	5.50
DHMN201210G-R47M02	0.47	$\pm 20\%$	1000	1000	22	26	4.50	5.00	5.50	6.00
DHMN201210B-R68M	0.68	$\pm 20\%$	1000	1000	37	43	4.00	4.30	4.50	5.00
DHMN201210B-1R0M	1.0	$\pm 20\%$	1000	1000	55	63	3.50	3.90	3.50	4.00
DHMN201210B-1R5M	1.5	$\pm 20\%$	1000	1000	76	85	2.60	3.10	2.70	3.20
DHMN201210B-2R2M	2.2	$\pm 20\%$	1000	1000	135	150	1.70	2.00	2.40	2.70
DHMN201210B-6R8M	6.8	$\pm 20\%$	1000	1000	440	520	1.30	1.50	1.20	1.45
DHMN201210B-100M	10	$\pm 20\%$	1000	1000	600	660	1.00	1.10	1.00	1.20

DHMN201608系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN201608B-R22M	0.22	$\pm 20\%$	1000	1000	14	19	5.90	6.60	5.60	6.10
DHMN201608B-R24M	0.24	$\pm 20\%$	1000	1000	14	20	5.80	6.50	5.50	6.00
DHMN201608B-R33M	0.33	$\pm 20\%$	1000	1000	18	24	4.80	5.50	5.30	5.80
DHMN201608B-R47M	0.47	$\pm 20\%$	1000	1000	24	27	4.40	4.60	5.00	5.50
DHMN201608B-R68M	0.68	$\pm 20\%$	1000	1000	39	44	3.50	3.80	4.20	4.60
DHMN201608B-1R0M	1.0	$\pm 20\%$	1000	1000	53	60	3.30	3.60	3.10	3.30
DHMN201608G-1R0M01	1.0	$\pm 20\%$	1000	1000	45	52	3.30	3.60	3.50	3.80
DHMN201608B-1R5M	1.5	$\pm 20\%$	1000	1000	73	85	2.80	3.10	2.80	3.00
DHMN201608B-2R2M	2.2	$\pm 20\%$	1000	1000	123	140	2.00	2.20	2.30	2.50
DHMN201608B-3R3M	3.3	$\pm 20\%$	1000	1000	200	220	1.50	1.80	1.80	2.10
DHMN201608B-4R7M	4.7	$\pm 20\%$	1000	1000	260	290	1.40	1.60	1.50	1.70
DHMN201608B-100M	10	$\pm 20\%$	1000	1000	690	800	0.90	1.00	0.90	1.00

DHMN201610系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN201610B-R10M	0.10	$\pm 20\%$	1000	1000	7	12	8.00	8.50	8.40	9.00
DHMN201610B-R15M	0.15	$\pm 20\%$	1000	1000	8	14	7.00	7.60	8.00	8.70
DHMN201610B-R22M	0.22	$\pm 20\%$	1000	1000	11	18	6.30	6.90	7.50	8.20
DHMN201610B-R24M	0.24	$\pm 20\%$	1000	1000	12	19	6.20	6.80	7.40	8.00
DHMN201610B-R33M	0.33	$\pm 20\%$	1000	1000	17	22	5.30	5.70	6.50	7.00
DHMN201610B-R47M	0.47	$\pm 20\%$	1000	1000	22	25	5.00	5.50	5.50	6.30
DHMN201610G-R47M01	0.47	$\pm 20\%$	1000	1000	19	23	5.60	6.00	5.60	6.20
DHMN201610B-R47M02	0.47	$\pm 20\%$	1000	1000	22	25	5.60	5.80	6.00	6.50
DHMN201610B-R68M	0.68	$\pm 20\%$	1000	1000	25	32	4.30	4.60	4.70	5.20
DHMN201610B-R68M02	0.68	$\pm 20\%$	1000	1000	25	32	5.20	5.50	5.50	5.70
DHMN201610B-1R0M	1.0	$\pm 20\%$	1000	1000	35	43	4.10	4.50	4.20	4.60
DHMN201610B-1R0M01	1.0	$\pm 20\%$	1000	1000	31	36	4.20	4.60	4.20	4.70
DHMN201610B-1R5M	1.5	$\pm 20\%$	1000	1000	80	100	2.30	2.60	2.90	3.20
DHMN201610B-2R2M	2.2	$\pm 20\%$	1000	1000	120	130	2.10	2.50	2.80	3.00
DHMN201610G-2R2M01	2.2	$\pm 20\%$	1000	1000	105	115	2.10	2.50	2.80	3.00
DHMN201610B-3R3M	3.3	$\pm 20\%$	1000	1000	140	170	1.50	1.70	2.00	2.30
DHMN201610B-4R7M	4.7	$\pm 20\%$	1000	1000	190	220	1.40	1.60	1.80	2.00
DHMN201610B-100M	10	$\pm 20\%$	1000	1000	483	580	0.70	1.00	1.10	1.40

DHMN201612系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN201612B-R10M	0.10	$\pm 20\%$	1000	1000	4	6	10.00	12.00	11.50	13.00
DHMN201612B-R15M	0.15	$\pm 20\%$	1000	1000	8	10	9.00	10.00	10.50	12.00
DHMN201612B-R24M	0.24	$\pm 20\%$	1000	1000	9	11	8.60	9.10	8.70	9.20
DHMN201612B-R33M	0.33	$\pm 20\%$	1000	1000	10	15	7.20	7.70	7.30	7.80
DHMN201612B-R47M	0.47	$\pm 20\%$	1000	1000	13	17	6.00	6.70	6.00	6.70
DHMN201612B-R68M	0.68	$\pm 20\%$	1000	1000	19	23	5.30	6.00	5.30	6.00
DHMN201612B-1R0M	1.0	$\pm 20\%$	1000	1000	30	36	4.50	5.00	4.50	5.00
DHMN201612B-1R5M	1.5	$\pm 20\%$	1000	1000	40	50	3.50	4.00	3.50	4.00
DHMN201612B-2R2M	2.2	$\pm 20\%$	1000	1000	77	90	2.90	3.30	2.70	3.10
DHMN201612B-3R3M	3.3	$\pm 20\%$	1000	1000	135	165	2.00	2.40	2.30	2.70

DHMN252010系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN252010B-R22M	0.22	$\pm 20\%$	1000	1000	12	17	6.50	6.80	7.90	8.60
DHMN252010B-R24M	0.24	$\pm 20\%$	1000	1000	12	18	6.40	6.70	7.80	8.50
DHMN252010B-R33M	0.33	$\pm 20\%$	1000	1000	13	19	6.20	6.50	7.20	7.60
DHMN252010B-R47M	0.47	$\pm 20\%$	1000	1000	15	22	5.60	6.10	6.50	6.90
DHMN252010B-R47M01	0.47	$\pm 20\%$	1000	1000	13	15	6.00	6.50	6.00	6.60
DHMN252010B-R68M	0.68	$\pm 20\%$	1000	1000	23	27	5.00	5.60	5.50	5.90
DHMN252010B-1R0M	1.0	$\pm 20\%$	1000	1000	25	30	4.10	4.50	4.80	5.30
DHMN252010B-1R5M	1.5	$\pm 20\%$	1000	1000	45	55	3.00	3.40	3.90	4.30
DHMN252010B-2R2M	2.2	$\pm 20\%$	1000	1000	62	70	2.10	2.40	3.00	3.30
DHMN252010B-2R2M02	2.2	$\pm 20\%$	1000	1000	62	70	2.30	2.60	3.30	3.70
DHMN252010B-2R2M01	2.2	$\pm 20\%$	1000	1000	62	70	3.20	4.00	3.10	3.40
DHMN252010B-3R3M	3.3	$\pm 20\%$	1000	1000	86	100	2.10	2.50	2.50	2.80
DHMN252010B-4R7M	4.7	$\pm 20\%$	1000	1000	160	180	1.60	2.00	2.00	2.60
DHMN252010B-4R7M01	4.7	$\pm 20\%$	1000	1000	145	160	1.60	2.00	2.00	2.60
DHMN252010B-6R8M	6.8	$\pm 20\%$	1000	1000	270	320	1.40	1.60	1.90	2.40
DHMN252010B-100M	10	$\pm 20\%$	1000	1000	500	560	0.95	1.05	1.40	1.55
DHMN252010G-220M	22	$\pm 20\%$	1000	1000	1100	1300	0.60	0.85	0.90	1.10

DHMN252012系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN252012B-R10M	0.10	$\pm 20\%$	1000	1000	6	10	10.50	12.00	12.50	13.50
DHMN252012B-R15M	0.15	$\pm 20\%$	1000	1000	7	11	10.00	11.50	12.00	13.00
DHMN252012B-R22M	0.22	$\pm 20\%$	1000	1000	9	14	7.60	8.20	9.00	9.60
DHMN252012B-R24M	0.24	$\pm 20\%$	1000	1000	10	15	7.50	8.00	8.80	9.30
DHMN252012B-R33M	0.33	$\pm 20\%$	1000	1000	11	17	6.40	6.80	7.80	8.30
DHMN252012B-R47M	0.47	$\pm 20\%$	1000	1000	13	19	6.00	6.50	7.00	7.50
DHMN252012B-R47M01	0.47	$\pm 20\%$	1000	1000	11	13	7.50	8.00	8.00	8.50
DHMN252012B-R68M	0.68	$\pm 20\%$	1000	1000	17	23	5.50	6.30	6.00	6.50
DHMN252012B-R68M01	0.68	$\pm 20\%$	1000	1000	15	18	7.00	7.50	6.00	6.70
DHMN252012B-R82M	0.82	$\pm 20\%$	1000	1000	19	24	5.30	5.80	5.80	6.50
DHMN252012B-1R0M	1.0	$\pm 20\%$	1000	1000	35	42	3.60	4.00	5.00	5.60
DHMN252012B-1R0M01	1.0	$\pm 20\%$	1000	1000	16	22	4.50	5.20	6.00	6.50
DHMN252012B-1R5M	1.5	$\pm 20\%$	1000	1000	44	50	3.20	3.70	4.10	4.50
DHMN252012B-1R5M01	1.5	$\pm 20\%$	1000	1000	27	32	4.20	4.60	4.40	4.70
DHMN252012B-2R2M	2.2	$\pm 20\%$	1000	1000	55	65	2.70	3.00	3.30	3.80
DHMN252012B-3R3M	3.3	$\pm 20\%$	1000	1000	80	97	1.80	2.30	2.70	3.00
DHMN252012B-4R7M	4.7	$\pm 20\%$	1000	1000	150	170	1.50	1.80	2.10	2.40
DHMN252012B-6R8M	6.8	$\pm 20\%$	1000	1000	245	270	1.40	1.60	1.70	2.00
DHMN252012B-100M	10	$\pm 20\%$	1000	1000	330	400	1.05	1.20	1.45	1.60

DHMN303015系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN303015B-1R0M	1.0	$\pm 20\%$	1000	1000	18	22	5.50	6.00	6.50	7.00
DHMN303015G-2R2M	2.2	$\pm 20\%$	1000	1000	42	50	4.00	4.50	4.50	5.00
DHMN303015B-4R7M	4.7	$\pm 20\%$	1000	1000	87	104	3.00	3.50	3.50	4.00
DHMN303015B-6R8M	6.8	$\pm 20\%$	1000	1000	160	180	2.00	2.50	3.00	3.50
DHMN303015B-100M	10	$\pm 20\%$	1000	1000	185	215	1.50	2.00	2.50	2.80
DHMN303015B-220M	22	$\pm 20\%$	1000	1000	580	700	1.00	1.20	1.20	1.60

DHMN303020系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN303020B-R33M	0.33	$\pm 20\%$	1000	1000	8	9	9.00	10.00	15.00	17.00
DHMN303020B-R50M	0.50	$\pm 20\%$	1000	1000	9	12	8.00	9.00	13.00	15.00
DHMN303020B-R68M	0.68	$\pm 20\%$	1000	1000	13	16	7.80	8.50	11.00	13.00
DHMN303020B-1R0M	1.0	$\pm 20\%$	1000	1000	14	20	6.00	6.50	7.30	8.00
DHMN303020B-1R5M	1.5	$\pm 20\%$	1000	1000	19	25	5.80	6.30	6.50	7.00
DHMN303020B-2R2M	2.2	$\pm 20\%$	1000	1000	37	45	4.30	4.70	5.50	6.00
DHMN303020B-3R3M	3.3	$\pm 20\%$	1000	1000	52	63	4.00	4.50	5.40	5.90
DHMN303020B-4R7M	4.7	$\pm 20\%$	1000	1000	60	73	3.80	4.20	4.00	4.80
DHMN303020B-6R8M	6.8	$\pm 20\%$	1000	1000	107	135	3.00	3.20	3.80	4.50
DHMN303020B-100M	10	$\pm 20\%$	1000	1000	135	160	2.20	2.50	3.30	3.80
DHMN303020B-150M	15	$\pm 20\%$	1000	1000	235	260	1.50	1.80	2.20	2.60

DHMN322510系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN322510B-R33M	0.33	$\pm 20\%$	1000	1000	11	15	7.80	8.30	7.80	8.30
DHMN322510B-R47M	0.47	$\pm 20\%$	1000	1000	17	22	5.90	6.40	7.60	8.30
DHMN322510B-R68M	0.68	$\pm 20\%$	1000	1000	22	28	5.70	6.20	7.00	7.50
DHMN322510B-1R0M	1.0	$\pm 20\%$	1000	1000	25	30	4.90	5.40	5.30	6.00
DHMN322510B-1R5M	1.5	$\pm 20\%$	1000	1000	34	42	3.60	4.00	4.40	5.00
DHMN322510B-2R2M	2.2	$\pm 20\%$	1000	1000	55	66	3.40	3.70	3.50	4.00
DHMN322510B-3R3M	3.3	$\pm 20\%$	1000	1000	105	120	2.30	2.70	3.30	3.70
DHMN322510B-4R7M	4.7	$\pm 20\%$	1000	1000	125	140	1.90	2.30	2.50	2.80
DHMN322510B-6R8M	6.8	$\pm 20\%$	1000	1000	290	320	1.60	1.90	2.00	2.40
DHMN322510B-100M	10	$\pm 20\%$	1000	1000	325	365	1.80	2.20	1.80	2.20

DHMN322512系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN322512B-R10M	0.10	$\pm 20\%$	1000	1000	5	7	11.00	12.00	16.50	18.00
DHMN322512B-R22M	0.22	$\pm 20\%$	1000	1000	7	10	8.70	9.20	11.00	11.50
DHMN322512B-R24M	0.24	$\pm 20\%$	1000	1000	7	12	8.50	9.00	10.50	11.00
DHMN322512B-R33M	0.33	$\pm 20\%$	1000	1000	9	14	8.10	8.40	9.50	10.00
DHMN322512B-R47M	0.47	$\pm 20\%$	1000	1000	14	19	7.20	7.50	8.20	8.60
DHMN322512B-R47M01	0.47	$\pm 20\%$	1000	1000	11	14	7.20	7.50	8.20	8.60
DHMN322512B-R68M	0.68	$\pm 20\%$	1000	1000	18	23	6.80	7.30	7.70	8.10
DHMN322512B-R68M01	0.68	$\pm 20\%$	1000	1000	12	15	6.50	7.00	7.50	8.00
DHMN322512B-1R0M	1.0	$\pm 20\%$	1000	1000	26	30	4.80	5.30	5.80	6.60
DHMN322512B-1R0M01	1.0	$\pm 20\%$	1000	1000	18	21	5.00	5.50	7.00	7.70
DHMN322512B-1R5M	1.5	$\pm 20\%$	1000	1000	37	44	4.30	4.70	4.70	5.10
DHMN322512B-2R2M	2.2	$\pm 20\%$	1000	1000	58	70	3.00	3.60	4.20	4.60
DHMN322512B-2R2M01	2.2	$\pm 20\%$	1000	1000	42	50	3.70	4.20	4.50	5.00
DHMN322512B-3R3M	3.3	$\pm 20\%$	1000	1000	75	95	2.50	2.90	3.20	3.70
DHMN322512B-4R7M	4.7	$\pm 20\%$	1000	1000	115	135	2.00	2.30	2.60	2.90
DHMN322512B-6R8M	6.8	$\pm 20\%$	1000	1000	177	210	1.90	2.10	2.40	2.80
DHMN322512B-100M	10	$\pm 20\%$	1000	1000	210	230	1.80	2.20	1.90	2.30

DHMN322520系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN322520B-R33M	0.33	$\pm 20\%$	1000	1000	8	9	9.00	9.50	14.00	15.50
DHMN322520B-R47M	0.47	$\pm 20\%$	1000	1000	9	11	8.50	9.50	13.00	15.00
DHMN322520B-R68M	0.68	$\pm 20\%$	1000	1000	13	15	8.00	9.00	11.00	13.00
DHMN322520B-1R0M	1.0	$\pm 20\%$	1000	1000	15	18	7.50	8.20	8.30	9.00
DHMN322520B-1R5M	1.5	$\pm 20\%$	1000	1000	22	25	6.00	6.50	6.00	6.80
DHMN322520B-2R2M	2.2	$\pm 20\%$	1000	1000	36	43	4.80	5.40	5.50	6.50
DHMN322520B-3R3M	3.3	$\pm 20\%$	1000	1000	55	60	4.00	4.50	3.50	4.50
DHMN322520B-4R7M	4.7	$\pm 20\%$	1000	1000	81	94	3.00	3.50	3.00	4.00
DHMN322520B-6R8M	6.8	$\pm 20\%$	1000	1000	101	125	2.30	2.80	2.90	3.80

DHMN404012系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN404012B-R47M	0.47	$\pm 20\%$	1000	1000	12	14	8.50	9.00	11.50	12.00
DHMN404012B-1R0M	1.0	$\pm 20\%$	1000	1000	21	25	5.50	6.30	10.00	11.00
DHMN404012B-1R5M	1.5	$\pm 20\%$	1000	1000	29	35	5.00	6.00	7.00	8.00
DHMN404012B-2R2M	2.2	$\pm 20\%$	1000	1000	45	55	4.50	5.00	6.00	6.50
DHMN404012B-3R3M	3.3	$\pm 20\%$	1000	1000	67	80	4.00	4.50	5.00	5.50
DHMN404012G-4R7M	4.7	$\pm 20\%$	1000	1000	90	110	3.00	3.50	4.50	5.00
DHMN404012B-5R6M	5.6	$\pm 20\%$	1000	1000	116	140	2.50	3.00	4.00	4.50
DHMN404012B-6R8M	6.8	$\pm 20\%$	1000	1000	132	160	2.30	2.80	3.50	3.80
DHMN404012B-100M	10	$\pm 20\%$	1000	1000	200	235	2.00	2.50	2.50	2.80

DHMN404020系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN404020G-R47M	0.47	$\pm 20\%$	1000	1000	7	9	8.00	8.50	15.00	16.00
DHMN404020G-2R2M	2.2	$\pm 20\%$	1000	1000	30	36	5.00	5.50	8.50	9.50
DHMN404020G-4R7M	4.7	$\pm 20\%$	1000	1000	47	58	4.00	5.00	5.50	6.30
DHMN404020G-100M	10	$\pm 20\%$	1000	1000	113	135	3.00	3.70	4.00	4.90
DHMN404020G-150M	15	$\pm 20\%$	1000	1000	210	250	1.70	2.30	3.00	3.50
DHMN404020G-220M	22	$\pm 20\%$	1000	1000	275	330	1.30	1.80	2.30	2.90

DHMN404030系列

型号规格 Part NO.	标称感量 Inductance (μ H)	精度级别 Accuracy Grade	测试频率 Test Frequency (KHz)	测试电压 Test Voltage (mV)	直流电阻 Rdc (m Ω)		额定电流 Idc (A)		饱和电流 Isat (A)	
					Typ	Max	Max	Typ	Max	Typ
DHMN404030B-R68M	0.68	$\pm 20\%$	1000	1000	8	10	8.00	9.50	15.00	17.00
DHMN404030G-1R5M	1.5	$\pm 20\%$	1000	1000	15	18	6.00	6.50	11.00	12.50
DHMN404030G-4R7M	4.7	$\pm 20\%$	1000	1000	41	46	4.00	4.30	6.00	7.00
DHMN404030B-6R8M	6.8	$\pm 20\%$	1000	1000	51	62	3.80	4.20	5.10	6.30